



电机安装板的尺寸

TC50EB


AT500
(无安装板)

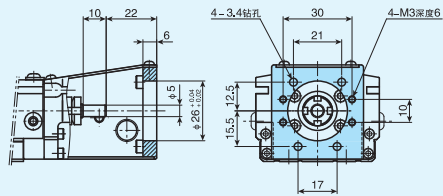


AT501

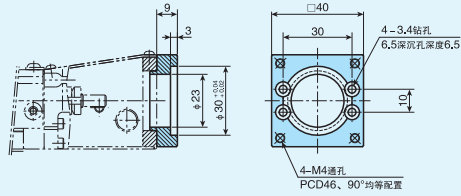

AT504

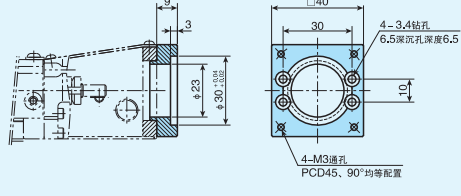


AT507
AT509

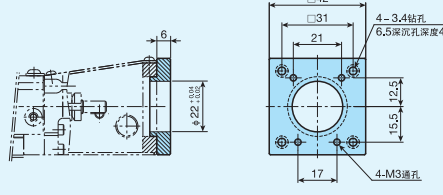


TC86EB


AT500
(无安装板)

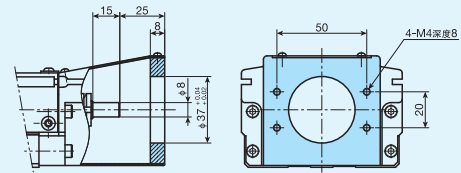


AT503

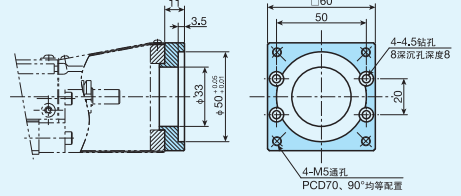

AT506

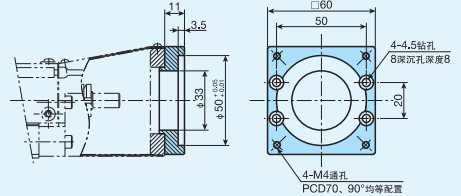


AT508
AT511

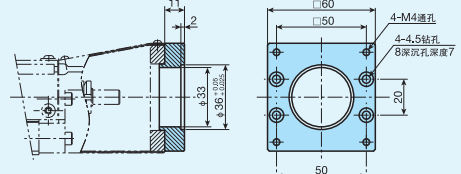


TC60EB


AT500
(无安装板)

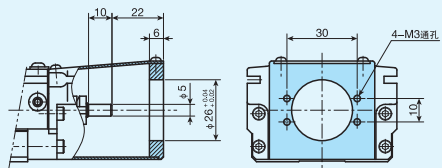


AT502

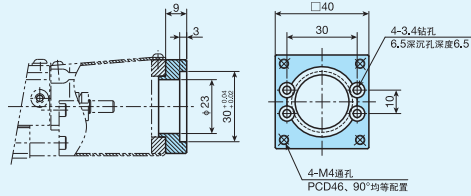

AT505

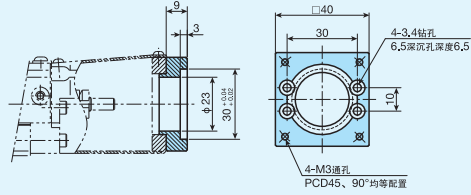


AT510

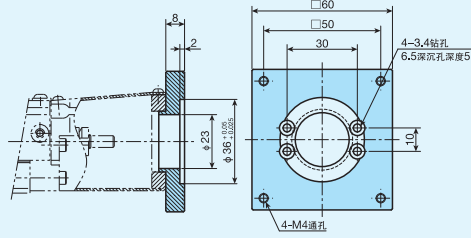


IKO 洁净精密定位工作台TC

TC50EB

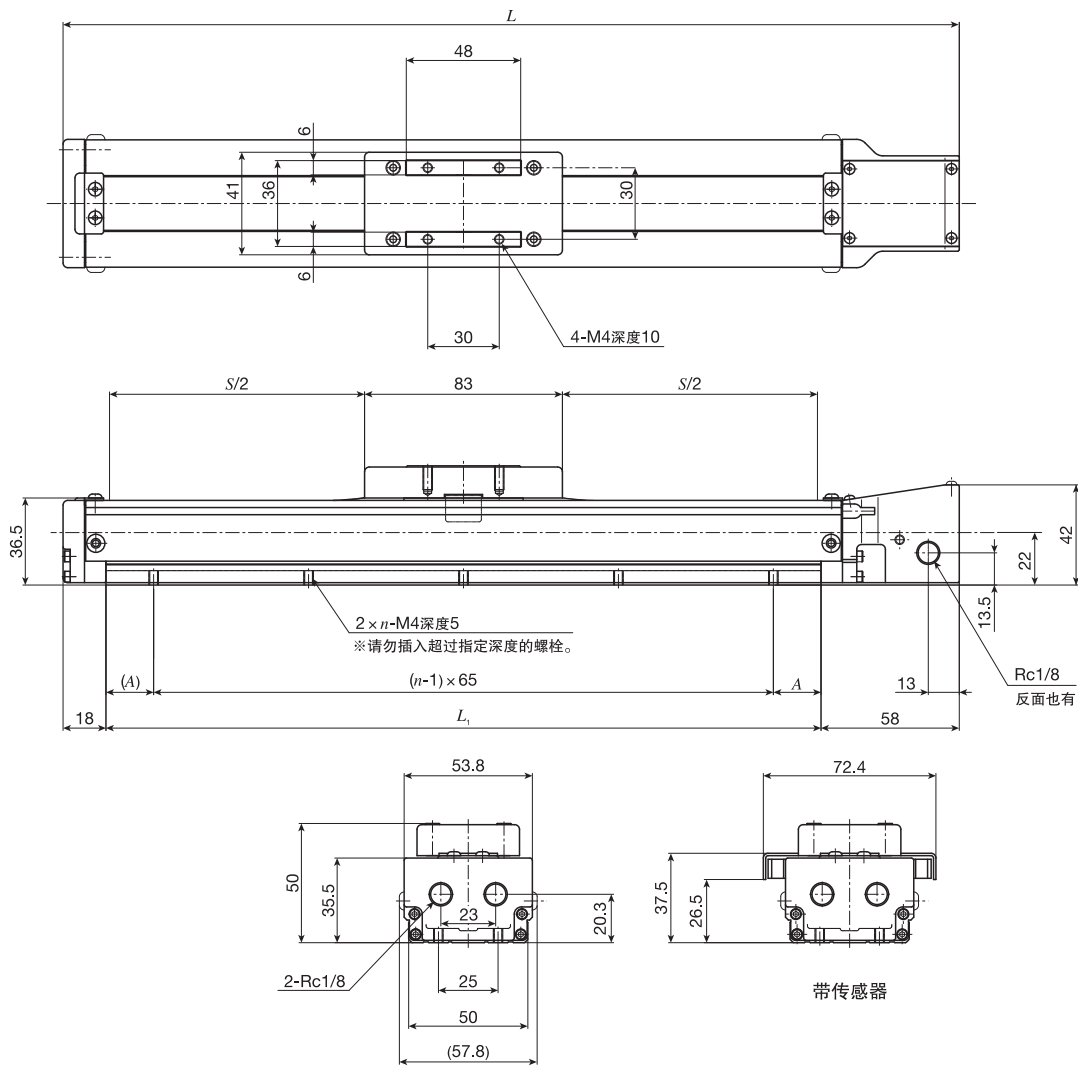

单位 mm


底座长度 L_1	全长 L	行程长度 S	底座安装孔		质量(参考) kg
			A	n	
150	226	50	10	3	0.9
200	276	100	35	3	1.0
250	326	150	27.5	4	1.1
300	376	200	20	5	1.2

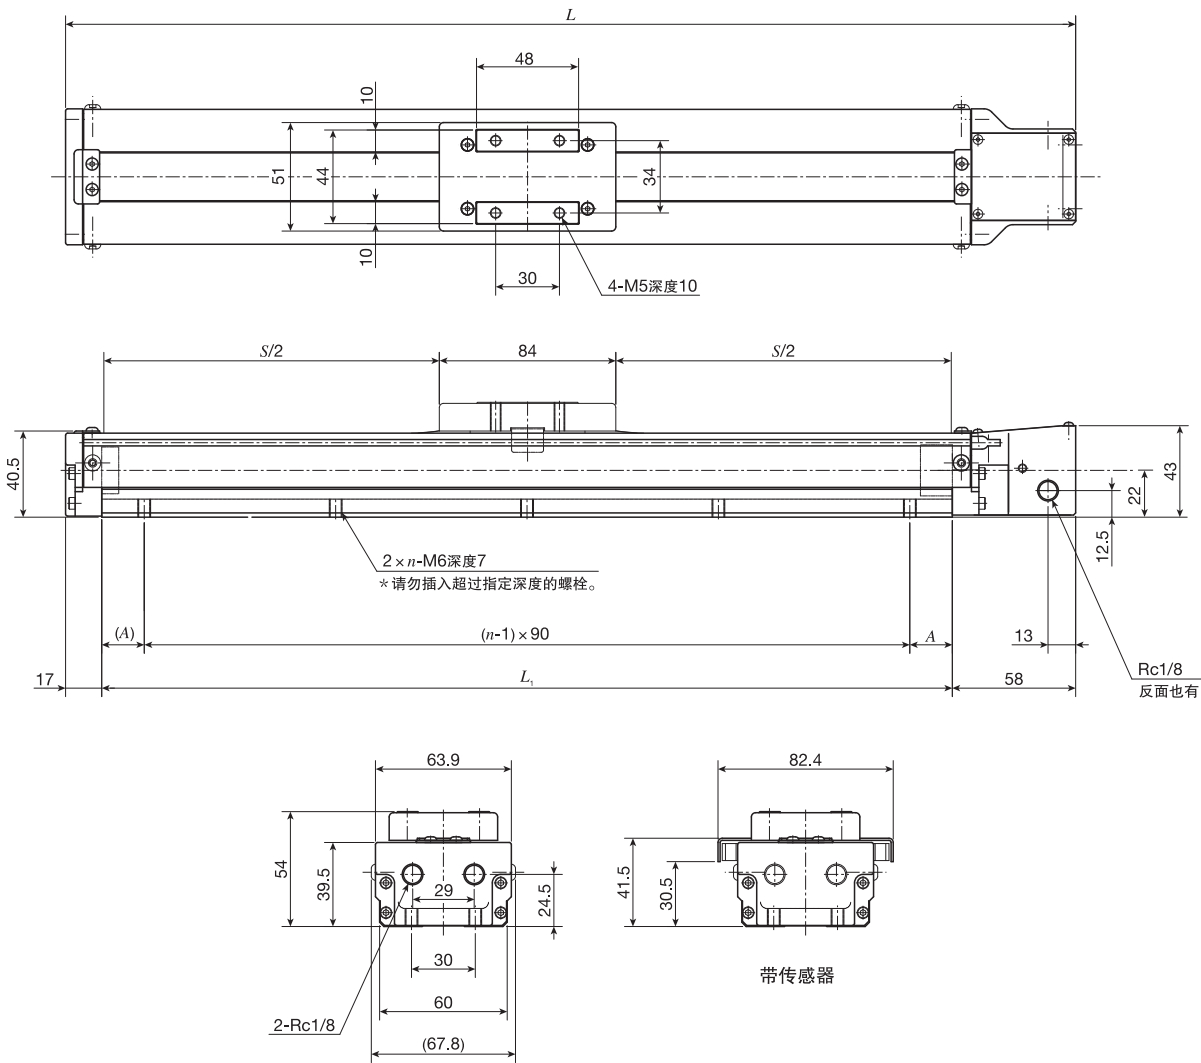

单位 mm

底座长度 L_1	全长 L	行程长度 S	底座安装孔		质量(参考) kg
			A	n	
150	225	50	30	2	1.1
200	275	100	10	3	1.3
300	375	200	15	4	1.7
400	475	300	20	5	2.0
500	575	400	25	6	2.4
600	675	500	30	7	2.7

备注 步进电机用电机安装板比底座底面低8mm。

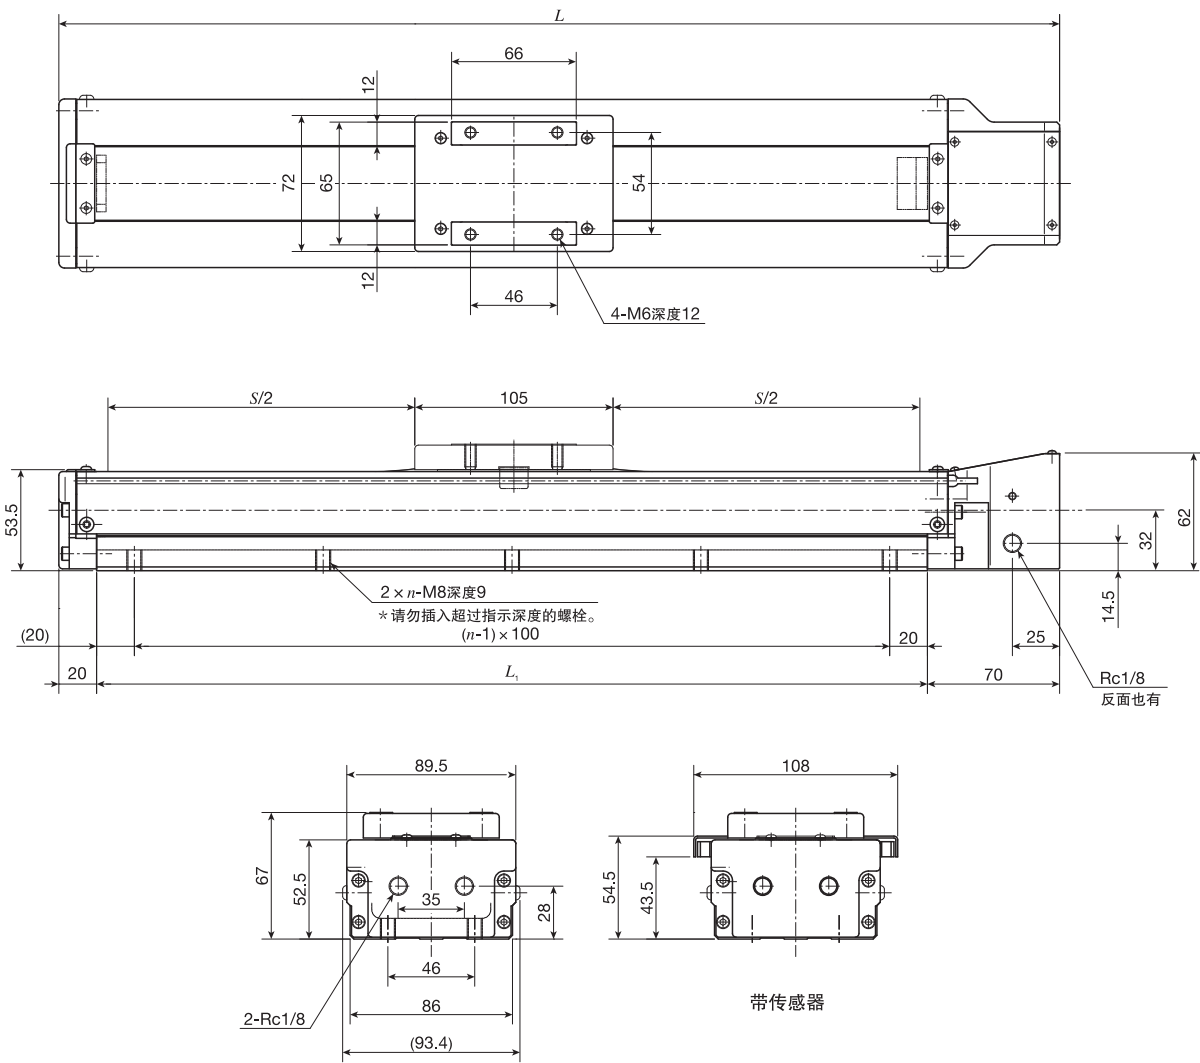

单位 mm

底座长度 L_1	全长 L	行程长度 S	底座安装孔 n	质量(参考) kg
340	430	200	4	3.6
440	530	300	5	4.2
540	630	400	6	4.8
640	730	500	7	5.4
740	830	600	8	6.0
840	930	700	9	6.6
940	1 030	800	10	7.3